SOYAL® AR-PB5 Stainless LED Push Button (No Power Supply Needed)

Specification

- Rating : 30VDC/100mA
- Mechanical Life : > 500,000 times
- Output Contact : N.O.
- Operation Travel : <0.7mm
- Actuating Force : 400~700gf

Wiring Diagram





[1] : Slim US & Rectangle US distance between screws hole centerpoint.

[2] : Square EU distance between screws hole centerpoint.

TEMPLATE

AR-PB5-041108 (Slim US Type)	41(W)X108(H)X13(D)
AR-PB5-068108 (Rectangle US Type)	68(W)X108(H)X13(D)
AR-PB5-086086 (Square EU Type)	86(W)X86(H)X13(D)

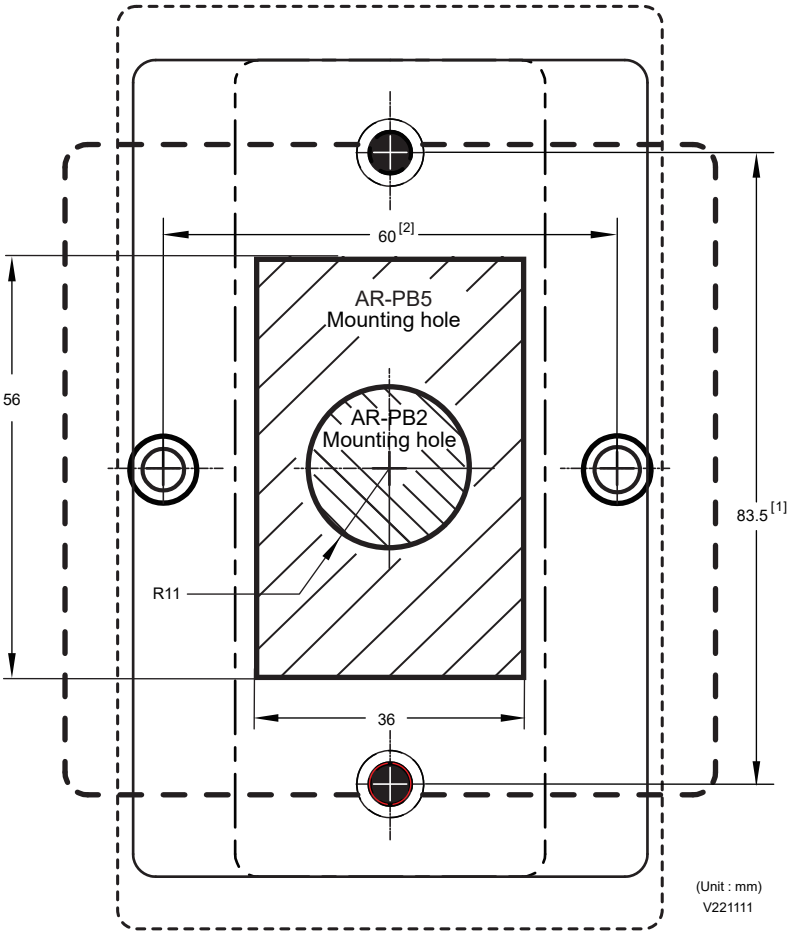

(Unit : mm)
V221111

SOYAL® AR-PB2 Stainless LED Push Button

Specification

- Rating : 30VDC/100mA
- LED : DC 12V(LED)
- Mechanical Life : > 500,000 times
- Output Contact : N.O. / N.C.
- Operation Travel : <0.7mm
- Actuating Force : 300~500gf

Wiring Diagram

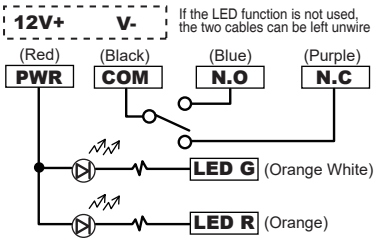

TEMPLATE

AR-PB2-041108 (Slim US Type)	41(W)X108(H)X15(D)
AR-PB2-068108 (Rectangle US Type)	68(W)X108(H)X15(D)
AR-PB2-072122 (Rectangle Wide US Type)	72(W)X122(H)X15(D)
AR-PB2-086086 (Square EU Type)	86(W)X86(H)X15(D)

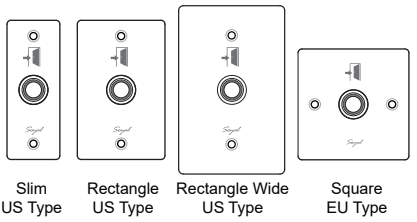

Slim US Type | Rectangle US Type | Rectangle Wide US Type | Square EU Type

[1] : Slim US & Rectangle US & Rectangle Wide US distance between screws hole centerpoint.

[2] : Square EU distance between screws hole centerpoint.